


NPS	L	d	NPT	D	Weight (lb)
1/4"	2.402	0.315	1/4"	1.280	0.353
3/8"	2.402	0.394	3/8"	1.280	0.353
1/2"	2.402	0.551	1/2"	1.280	0.375
3/4"	2.598	0.748	3/4"	1.535	0.573
1"	3.051	0.945	1"	1.870	0.904
1 1/4"	3.386	1.220	1 1/4"	2.303	1.455
1 1/2"	3.740	1.535	1 1/2"	2.598	2.028
2"	4.173	1.929	2"	3.130	2.888

Nominal pressure		4.0Mpa	
Test pressure	Shell test	6.0	Test medium
	Seal test	4.4	
Gas seal test	0.6	Water, Oil, Gas	Test temperature
	0.6		
Applicable medium		Water, Oil, Gas	
Applicable temperature		-20~302°F	

NOTE:

1. Design and Manufacture for valve according to ASME B16.34.
2. Inspection and Test for valve according to API 598.
3. The connection of screwed for valve according to ANSI B1.20.1.

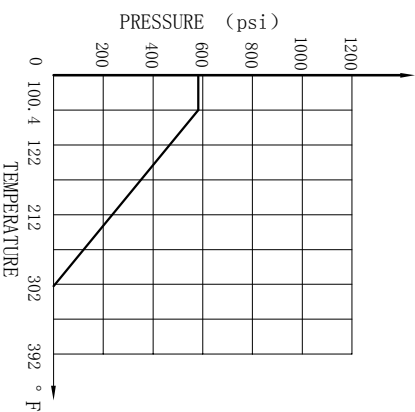

5	BONNET	1	A351 CF8M
4	GASKET	1	PTFE
3	SPRING	1	SS316
2	DISC	1	A351 CF8M
1	BODY	1	A351 CF8M
NO.	DESCRIPTION	Q'TY	MATERIAL
ANIX®			
ANIX VALVE USA			
MARK DRA.	BEFORE MODIFIED	AFTER MODIFIED	SCALE
CHK.	DATE		
2PC Chevk Valve PY40, NPT			CV12W6N/40