


NPS	L	d	NPT	Lo	H	Weight (lb)
1/4"	1.575	0.197	1/4"	2.756	1.319	0.154
3/8"	1.772	0.276	3/8"	2.756	1.378	0.220
1/2"	2.165	0.354	1/2"	3.150	1.535	0.330
3/4"	2.362	0.453	3/4"	3.740	1.929	0.529
1"	2.756	0.591	1"	4.134	2.126	0.838
1 1/4"	3.150	0.768	1 1/4"	4.724	2.579	1.411
1 1/2"	3.386	0.984	1 1/2"	5.512	2.835	1.874
2"	3.976	1.260	2"	5.906	3.189	2.822
2 1/2"	4.685	1.496	2 1/2"	6.693	3.799	4.938
3"	5.512	1.929	3"	7.283	4.134	6.570
4"	7.323	2.520	4"	8.661	4.646	13.669

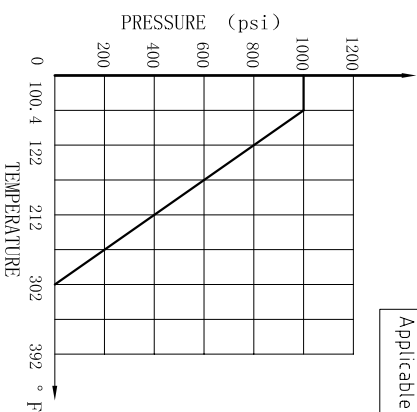

NOTE:
 1. Design and Manufacture for valve according to ASME B16.34.
 2. Inspection and Test for valve according to API 598.
 3. The connection of screwed for valve according to ANSI B1.20.1.

Nominal pressure			1000Psi			
Test pressure	Shell test	10.4	Test medium	Water	Test temperature	Normal temperature
	Seal test	7.6		Air		
	Gas seal test	0.6				
Applicable medium			Water, Oil, Gas			
Applicable temperature			-20~302°F			

13	NUT	1	A194 8
12	SPRING WASHER	1	304
11	HANDLE	1	STAINLESS STEEL
10	GLAND	1	304
9	PACKING	1	PTFE
8	STEM WASHER	1	PTFE
7	STEM	1	A276 316
6	NUT	1	316
5	GASKET	1	316
4	SEAT RING 2	1	PTFE
3	BALL	1	SS316
2	SEAT RING 1	1	PTFE
1	BODY	1	A351 CF8M
NO.	DESCRIPTION	QTY	MATERIAL
ANIX®			
MARK BEFORE MODIFIED		AFTER MODIFIED	
DRAWN	DATE	SCALE	
ANIX VALVE CO., LTD		IPC Ball Valve	
1000PSI, NPT		BV11F6N/1000	